




Serie 15

Superficie

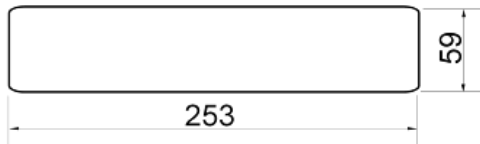

Empotrada

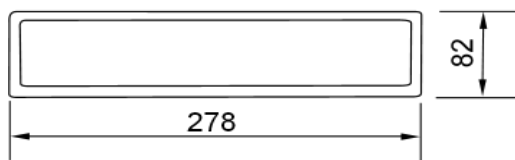

Serie 15 IP44 - IK04

Referencia	Flujo Lm	Autonomía	Tipo*	Lámpara Emergencia	Piloto testigo de carga
15-060P	60	1 h	P.	Power LEDs	LED verde
15-110P	110	1 h	P.	Power LEDs	LED verde
15-150P	150	1 h	P.	Power LEDs	LED verde
15-200P	200	1 h	P.	Power LEDs	LED verde
15-300P	300	1 h	P.	Power LEDs	LED verde
15-400P	400	1 h	P.	Power LEDs	LED verde
15-500P	500	1 h	P.	Power LEDs	LED verde

* P. = Permanente

Características

- Diseñadas según norma UNE-EN 60598-2-22, UNE-EN 60598-1.
- Grado de protección: IP44 - IK 04.
- Grado de aislamiento: Clase II.
- Alimentación 230Vac - 50/60Hz (opcional otras alimentaciones).
- LED indicador de presencia de red y carga de batería.
- Batería de Ni-Cd estanca, de alta temperatura.
- Instalación rápida con base pre-placa.
- Telemandable.
- Marcado CE y de acorde a la directiva RoHS.